

Neo *flex*™

RESILIENT FLOORING

**High Impact Tile
for Free Weight Areas**



Feel the difference.

Neoflex™ High Impact Tile for Free Weight Areas

- 45 mm (1.75”) thick robust, resilient rubber tiles installed in free weight areas
- Designed to attenuate the impact of heavy free weights that thinner surfaces cannot achieve
- Provide superior sound and vibration insulation ensuring that areas below, around and above the gym remain quiet
- Available in a huge variety of colors and finishes

HIGH IMPACT TILE







Neoflex™ High Impact Rubber Tiles are supplied in various styles to suit your design.




Royal Red

Royal

Top surface is made of ± 8 mm thick synthetic EPDM Rubber Top Layer that is molded to a recycled rubber base.

Standard Royal Colors

Royal Black

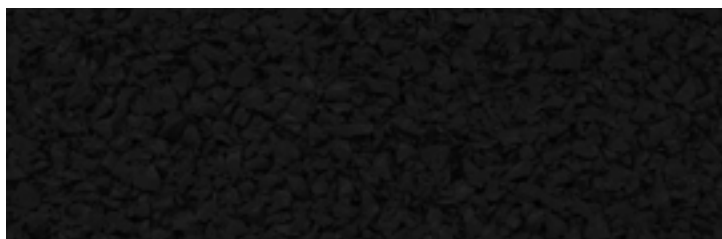


Royal Blue



Royal Red



Royal Green

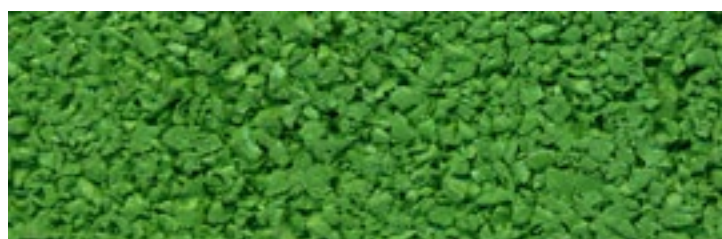

Royal Yellow




Royal Orange



Royal Purple



Royal Tele Gray

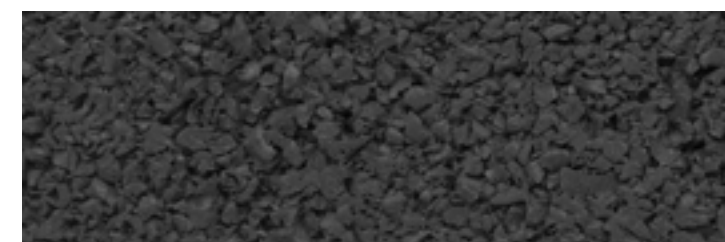

Neoflex High Impact Designer 675
Shangri-La Hotel Health Club
Kuala Lumpur, Malaysia



Designer 600-008

Designer Top surface is made of a 4 mm thick Neoflex® 600 or 800 Series Rubber Sheet Top Layer that is molded to a recycled rubber base. Choose any Neoflex™ 600 or 800 Series flooring color for the top surface of your Neoflex™ High Impact Tiles.

Example Designer Colors

Designer 803





Designer 819



Designer 633



Designer 600-012

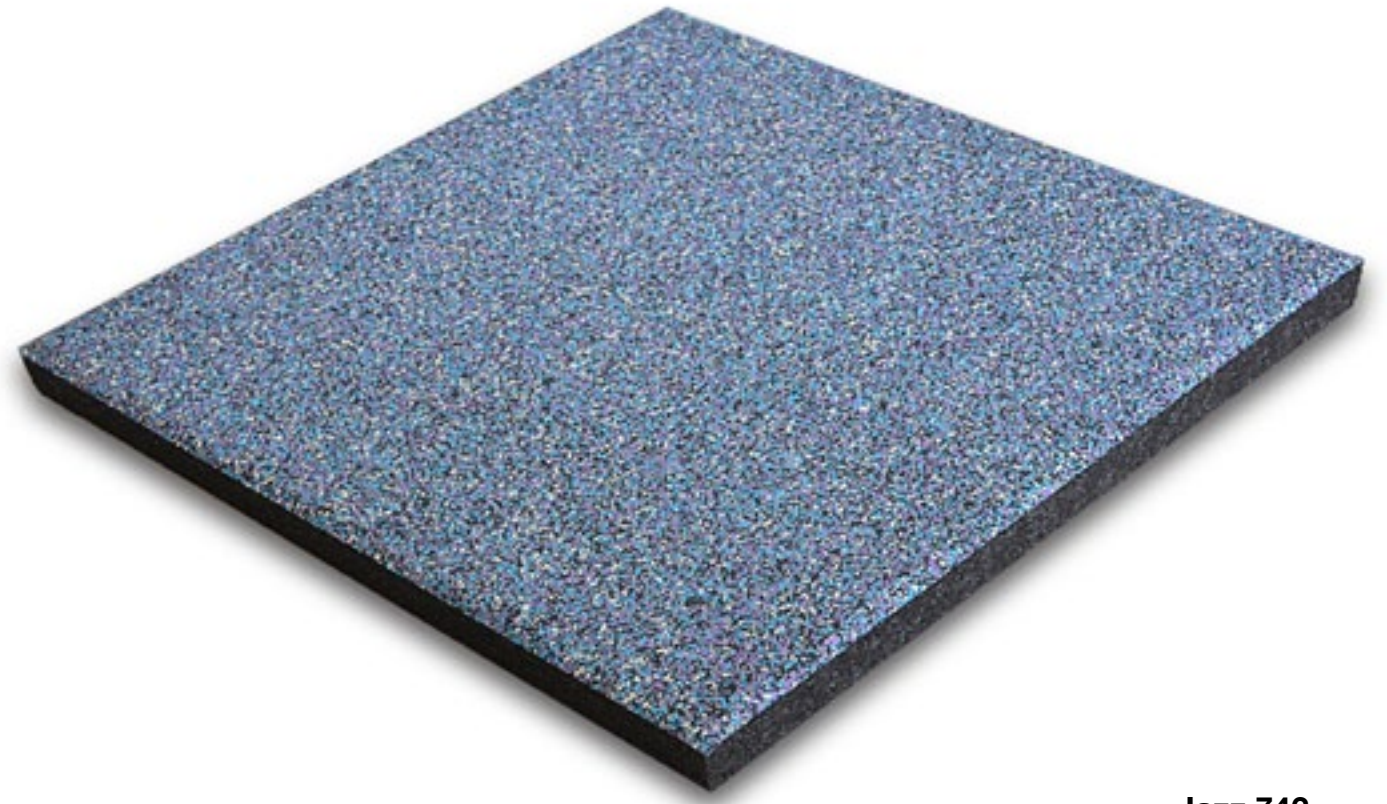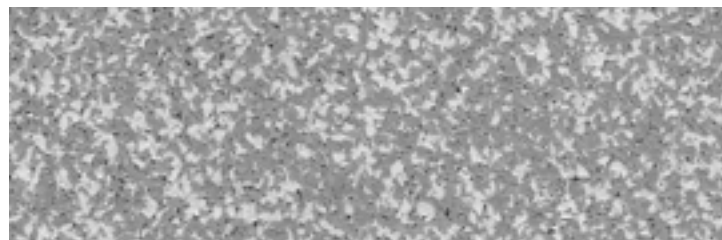

Jazz 742


Jazz Top surface is made of a 4 mm thick Neoflex® 700 Series Rubber Sheet Top Layer that is molded to a recycled rubber base. Choose any Neoflex™ 700 Series flooring color for the top surface of your Neoflex™ High Impact Tiles.

Example Jazz Colors


Jazz 720



Jazz 700-006

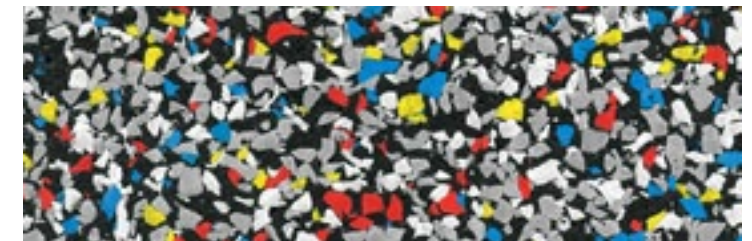

Jazz 744

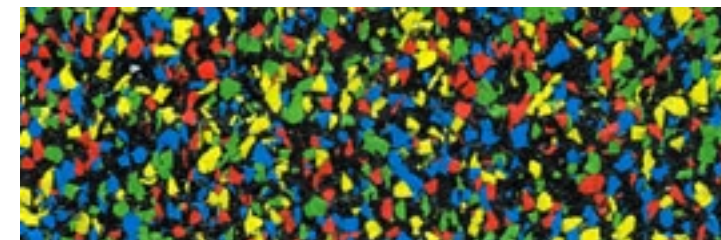

Jazz 750






Galaxy 554


Galaxy Made of black recycled rubber, colored with sprinkled EPDM rubber granules on the top surface.

Standard Galaxy Colors


Galaxy 503

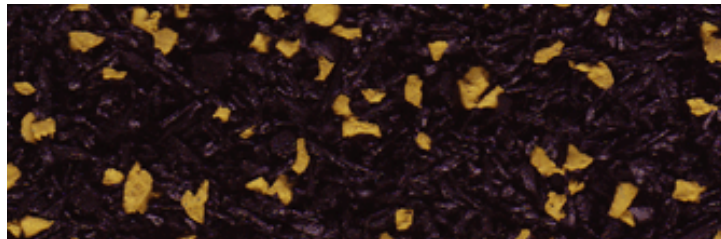


Galaxy 504

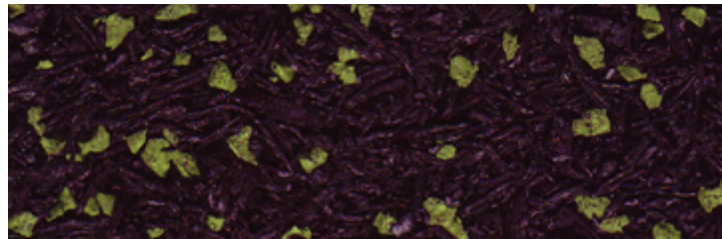

Galaxy 519

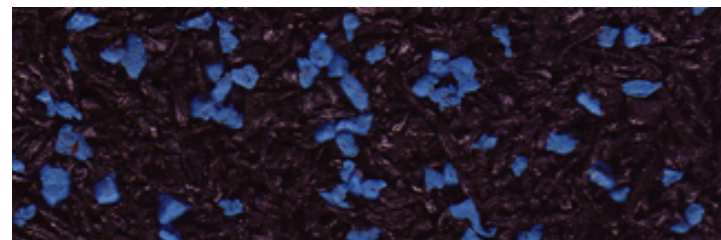

Galaxy 553

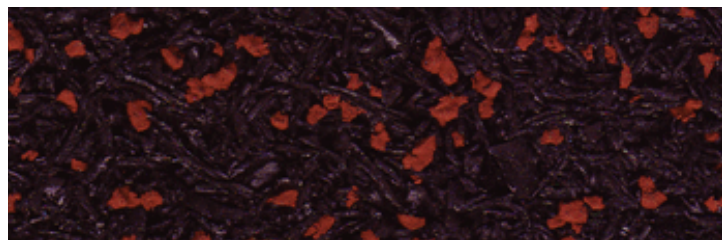


Basic Black


Basic Made of black recycled rubber, colored with a pigmented polyurethane binder.

Standard Basic Colors


Basic Black

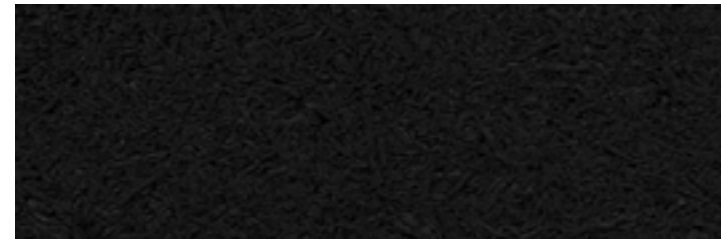


Basic Red

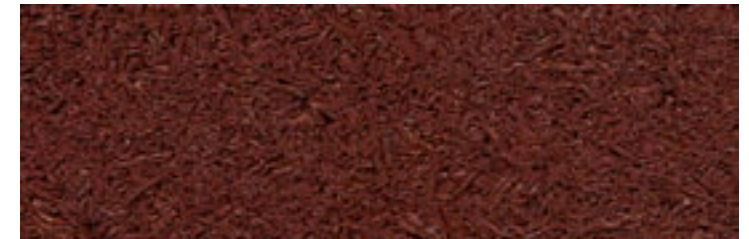

Basic Green

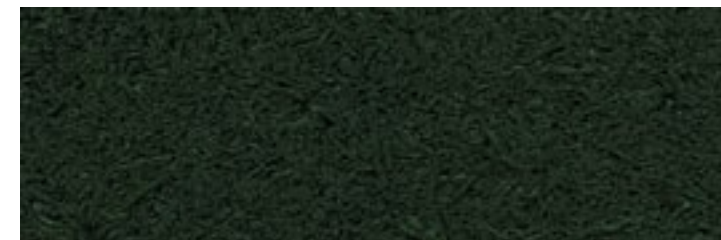

Neoflex High Impact Tile Specifications

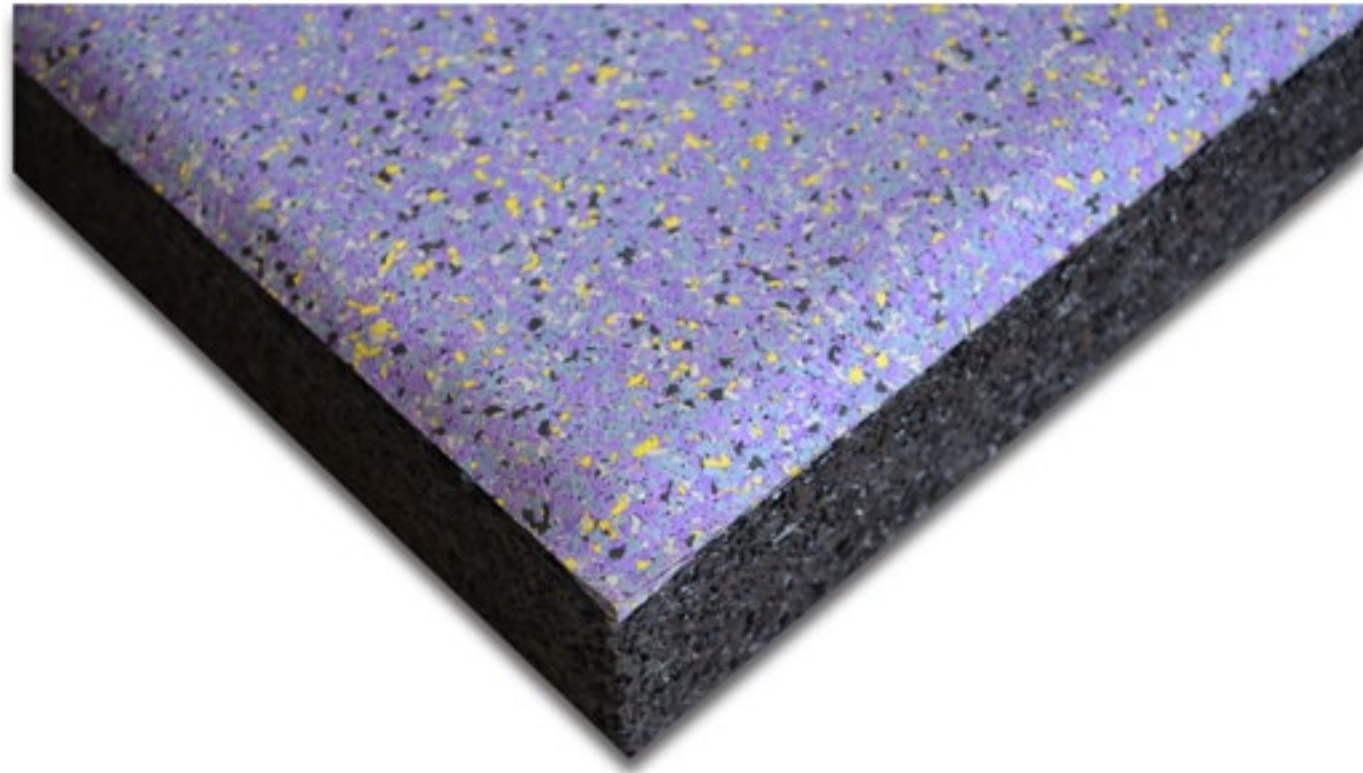

Neoflex High Impact Jazz 737
 Kiara 9 Residency Fitness Center
 Mont Kiara, Malaysia



Description		Prefabricated Resilient Rubber Tile supplied in 3 x sizes composed of an EPDM rubber top surface supported by a recycled rubber base layer
Application		Free weight areas for indoor gyms and fitness areas
Benefit		Excellent impact attenuation with very good sound and vibration insulation
Thickness		45 mm (1.75")
Sizes		505 mm x 505 mm (20" x 20") 605 mm x 605 mm (24" x 24") 1010 mm x 1010 mm (40" x 40")
Traction	BS 7044	Good
Slip Resistance	BS 7044	Pass
Fatigue Resistance	BS 7044	No cracking or fracture
Spike Resistance	BS 7044 – up to 50,000 revs	Pass
Residual Indentation	BS 7044	0.64 mm – Pass
Color Transfer	BS 1006 A03	Pass
Flammability	ASTM D2859	Class 1